




## 200W Single output DC/DC power supply

SD Series

- High efficiency, long service life and high reliability
- Output protection function: Over current/short circuit
- Ultra wide operating temperature range -10°C~60°C
- Long service life electrolytic capacitor
- 100% full load ageing test
- No fan, quiet
- 3 years




MODEL		SD-200A-12	SD-200B-12	SD-200C-12	SD-200A-24	SD-200B-24	SD-200C-24	SD-200A-48	SD-200B-48	SD-200C-48
OUTPUT	DC Output	12V			24V			48V		
	Rated Current	16.7A			8.3A			4.2A		
	CurrentRange	0~16.7A			0~8.3A			0~4.2A		
	Ripple and Noise	100mV			200mV			200mV		
	Voltage ADJ. Range	±10% of rated output voltage								
	Voltage Accuracy	±2.0%			±1.0%			±1.0%		
	Line Regulation	±0.5%			±0.3%			±0.2%		
	Load Regulation	±0.5%			±0.3%			±0.2%		
	Set-up Time	< 1S								
	Hold up Time	< 50ms								
INPUT	VoltageRange	A:10 ~ 18VDC B:20 ~ 36VDC C:36 ~ 72VDC								
	FrequencyRange	47Hz~63Hz								
	Efficiency	82%	84%	82%	85%	86%	84%	86%	86%	90%
PROTECTION	Over Load	105%~150% of rated output current, hiccup mode, auto recovery								
	Over power	120%~135% of rated output current, hiccup mode, auto recovery								
	Short Circuit	Long-term mode, auto recovery								
ENVIRONMENT	Operating amb. Temp. & Hum.	-10°C~60°C; 20%~90%RH								
	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH								
SAFETY & EMC	Safety Standards	Reference LVD design,TUV EN62368-1								
	Withstand Voltage	I/P-O/P:1.5KVAC I/P-FG:2.0KVAC O/P-FG:0.5KVAC								
OTHERS	MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)								
	Dimension (L*W*H)	200*112*50mm								
	Packing	1200g/PCS								
	Cooling method	Cooling by free air convection								
NOTE	1.All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.									

Block diagram of internal mechanism





Block diagram of internal mechanism

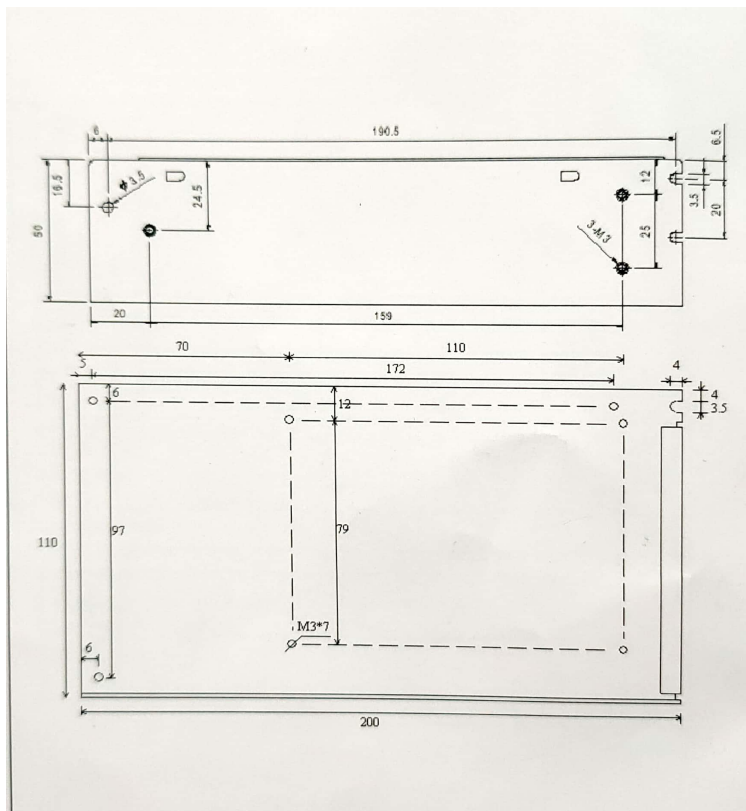

Declining curve:

